



Rec'd PCT/PTO 06 APR 2005

PCT/GB / 005201

G-B03/5201

10/530486

#2



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

RECEIVED

22 JAN 2004

WIPO

PCT

## PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.


In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 8 January 2004

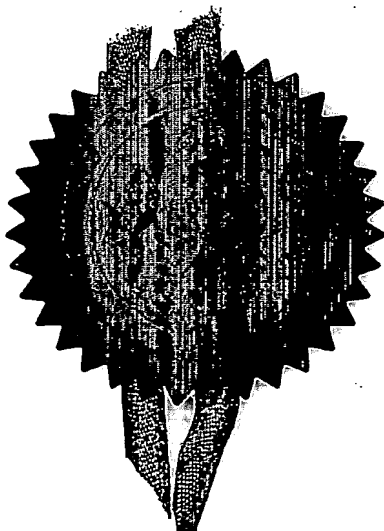

An Executive Agency of the Department of Trade and Industry

Best Available Copy



03DEC02 E767922-1 D00180  
P01/7700 0:00-0228064.2

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP9 1RH

1. Your reference	NG/ARB/20734		
2. Patent application number <i>(The Patent Office will fill in this part)</i>	0228064.2		
3. Full name, address and postcode of the or of each applicant <i>(underline all surnames)</i>	SMITH INTERNATIONAL, INC.		
Patents ADP number <i>(if you know it)</i>	16740 Hardy Street Houston Texas 77205-0068 USA (A Delaware Corporation)USA		
If the applicant is a corporate body, give the country/state of its incorporation	5796727001		
4. Title of the invention	APPARATUS AND METHOD FOR OPENING AND CLOSING LATERAL BOREHOLES		
5. Name of your agent <i>(if you have one)</i>	A A THORNTON & CO		
"Address for service" in the United Kingdom to which all correspondence should be sent <i>(including the postcode)</i>	235 HIGH HOLBORN LONDON WC1V 7LE		
Patents ADP number <i>(if you know it)</i>	75001		
6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and <i>(if you know it)</i> the or each application number	Country	Priority application number <i>(if you know it)</i>	Date of filing <i>(day / month / year)</i>
7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing <i>(day / month / year)</i>	
8. Is a statement of inventorship and of right to grant of a patent required in support of this request? <i>(Answer 'Yes' if:</i> a) <i>any applicant named in part 3 is not an inventor, or</i> b) <i>there is an inventor who is not named as an applicant, or</i> c) <i>any named applicant is a corporate body.</i> <i>See note (d))</i>	YES		

**Patents Form 1/77**

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 14

Claim(s) 3

Abstract 1 *DMC*

Drawing(s) 11 *5/11*

10. If you are also filing any of the following, state how many against each item.

Priority documents ---

Translations of priority documents ---

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*) 1 ✓

Request for preliminary examination and search (*Patents Form 9/77*) 1 ✓

Request for substantive examination (*Patents Form 10/77*) ---

Any other documents (please specify) ---

11. I/We request the grant of a patent on the basis of this application.

Signature

*[Handwritten Signature]*

Date

02-12-02

12. Name and daytime telephone number of person to contact in the United Kingdom

NIGEL GOODENOUGH - 01604 638242

**Warning**

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

**Notes**

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

1  
APPARATUS AND METHOD FOR  
OPENING AND CLOSING LATERAL BOREHOLES

The present invention relates to a method and apparatus for opening and closing lateral boreholes and particularly, but not exclusively, to a method and apparatus for selectively opening and sealingly closing a lateral borehole.

It is well known in the oil and gas drilling industries to provide a primary borehole with one or more lateral boreholes. The deflection of downhole equipment from the primary borehole into a lateral borehole may be readily achieved through location of a deflector/whipstock downhole of the primary/lateral borehole junction. It is also known for the types of deflector/whipstock used in this manner to be provided with an axially extending bore for allowing access to the portion of primary borehole located downhole of said junction. In this way, use of the primary borehole or an associated lateral borehole may be selected. However, if use of the lateral borehole is no longer required or not required for considerably long periods of time, then it can be desirable to close the opening in the primary borehole which extends into the lateral borehole. However, closing the opening in the primary borehole requires removal of the deflector so that specialist closing equipment can be employed. This is time consuming, costly and inconvenient.

It is an object of the present invention to provide a method and apparatus for controlling access to a lateral borehole.

A first aspect of the present invention provides a downhole tool for selectively opening and closing a lateral borehole extending from a primary borehole, the downhole tool comprising a body incorporating a wall provided with an opening extending therethrough; a deflector member slidably mounted in the body and having a deflecting surface for deflecting, in use, downhole equipment laterally within the body, the deflector member being slidable between an open position, in which the deflecting surface is located adjacent and facing towards said opening so that, in use, downhole equipment laterally deflected by the deflecting surface is directed through said opening, and a closed position, in which the deflecting surface is oriented relative to said opening so as to prevent downhole equipment from being laterally deflected through said opening during use; and constraining means for restricting movement of the deflector member relative to

the body.

Thus, in circumstances where use of both a primary borehole and a lateral borehole is required, the deflector member of the present invention may be located in an open position so that the deflecting surface may deflect equipment laterally through said opening and into an adjacent lateral borehole. If, however, use of only the primary borehole is required, then the opening may be closed by moving the deflector member into a closed position.

Ideally, the constraining means comprises a pin and groove arrangement. At least one pin may be secured to one of the body and deflector member for locating in a groove defined in the other of the body and deflector member. The pin and groove arrangement is preferably such that the deflector member must move axially between two different closed positions before being able to move axially to the open position. The constraining means may also comprise a shoulder defined by the body. The deflector member may abut the shoulder when in the open position.

The downhole tool of the present invention may also comprise means for allowing axial movement of the deflector member by the action of fluid pressure. A bore preferably extends axially through the deflector member. Furthermore, it is preferable for the bore extending axially through the deflector member to comprise first and second portions, the first portion having a larger diameter than the second portion. The deflecting surface may be defined on that portion of the deflector member reducing the diameter of the bore through the deflector member.

It is particularly preferable for sealing means to be provided between the body and deflector member so that, when in the closed position, fluid located to the exterior of the body is prevented from flowing into the bore of the deflector member. The sealing means may comprise seals mounted on the deflector member and axially spaced from one another so as to be locatable beyond each axial end of said opening.

In the closed position, it is preferable for the deflecting surface of the deflector member to face diametrically away from said opening. Also, in the closed position, it is preferable for said opening to be completely covered by the deflector member. Also, when in the closed position, the deflecting surface may be axially spaced from said opening.

A second aspect of the present invention provides a method of using a downhole tool in accordance with the first aspect of the present invention, the method comprising the steps of running said tool down a primary borehole, aligning said opening of said tool body with a lateral borehole extending from said primary borehole, and selectively moving said deflector member between said open and closed positions.

The step of moving said deflector member may comprise the step of applying a fluid pressure to said deflector member. Alternatively, said step of moving said deflector member may comprise the step of gripping said deflector member with a further tool and manipulating said deflector member with said further tool.

It will be appreciated that the present invention provides the advantage over the prior art of allowing a lateral opening to be conveniently opened and closed.

A third aspect of the present invention provides a downhole deflector member comprising a cylinder having a window provided in a side thereof and having a ramp defined on an interior surface thereof for deflecting, in use, downhole equipment through said window; wherein a bore extends longitudinally through the deflector member so as to allow, in use, a passage of downhole equipment through the deflector member without deflection by said ramp; and wherein a portion of said bore located uphole of said ramp has a larger diameter than the remainder of said bore.

A deflector member in accordance with the third aspect of the present invention may be used in conjunction with an expandable head tool to selectively deflect downhole equipment through a window in said deflector member and into an adjacent lateral borehole. The bore extending longitudinally through the deflector member allows downhole equipment to be run through the deflector member past the ramp to the primary borehole located downhole of the primary/lateral junction. It will be understood that, in order for downhole equipment to pass the ramp without being deflected, said equipment must have an external diameter no greater than the diameter of the deflector member bore. However, downhole equipment provided with an expandable head tool may be not only run past the ramp into the primary borehole located below the primary/lateral junction, but may be optionally deflected by the ramp through the window into a lateral borehole by expanding the expandable head tool whilst said tool is located in said portion of bore having an enlarged diameter. In so increasing the external diameter of said tool, the

downhole equipment adopts an external diameter greater than the diameter of the bore extending past the ramp. Accordingly, with the expandable head tool in an expanded configuration, the downhole equipment is unable to pass the ramp and, when pressed downhole through the deflector member, comes into contact with the ramp and is thus deflected by the ramp into the window.

Ideally, the remainder of said bore is located both uphole and downhole of said portion of said bore. Thus, with smaller diameter portions of bore being located either side of the enlarged diameter portion of bore, downhole equipment to be run past the lateral window without deflection may be guided past the enlarged diameter bore by the smaller diameter portion of bore located uphole thereof. In other words, with the uphole and downhole portions of the smaller diameter bore being located co-axially with each other, the uphole portion of bore effectively aligns equipment with the downhole portion of bore and thereby guides equipment into the downhole portion of bore and minimizes the risk of said equipment being deflected by the ramp.

A fourth aspect of the present invention provides a method of using the deflector member of the third aspect of the present invention, the method comprising the steps of running an expandable head tool downhole into the deflector member; expanding said tool so as to increase the diameter thereof and thereby prevent passage of said tool through the remainder of said bore; and pressing said tool downhole so that said tool is deflected by said ramp.

Embodiments of the present invention will now be described, by way of example only, with reference to the accompanying drawings, in which:

FIGURES 1A and 1B provide a cross-sectional side view of a first embodiment of the present invention arranged in a closed configuration;

FIGURE 2 is a cross-sectional end view taken along line 2-2 of Figure 1A;

FIGURE 3 is an unwrapped view of the control groove shown in Figure 1A;

FIGURES 4A and 4B provide a cross-sectional side view of the first embodiment arranged in an open configuration;

FIGURE 5 is a cross-sectional side view of a second embodiment of the present invention arranged in an open configuration;

FIGURE 6 is a cross-sectional side view of the second embodiment arranged in a

closed configuration;

FIGURE 7 is a cross-sectional side view of two embodiments as shown in Figures 5 and 6 connected to one another;

FIGURES 8 and 9 are cross-sectional side views of an expandable head tool located in the deflector bore of the second embodiment arranged in closed and open configurations respectively, the expandable head tool being shown passing through to a primary borehole;

FIGURE 10 is a cross-sectional side view of the expandable head tool of Figures 8 and 9 shown in an expanded configuration and being deflected through a lateral window;

FIGURE 11 is a cross-sectional side view of the expandable head tool of Figures 8 and 9 shown in an expanded configuration gripping a reduced diameter deflector bore;

FIGURES 12 and 13 are cross-sectional side views of a solid deflector sub respectively located in unlatched and latched positions within a reduced diameter deflector bore; and

FIGURE 14 is a detailed cross-sectional side view of the solid deflector sub of Figures 12 and 13 latched to a deflector member.

A first downhole tool 2 according to the present invention is shown in Figures 1 to 4 of the accompanying drawings. The tool 2 comprises a body member 4 in which a whipstock or deflector member 6 is located. The body member 4 has a generally cylindrical shape with a longitudinal bore 8 extending therethrough. The body member 4 comprises an upper cylindrical portion 10 which is threadedly connected to a window portion 12 of the body member 4 by virtue of a threaded collar 14. The window portion 12 has a cylindrical shape with a lateral window or opening 16 defined in the side thereof for alignment, in use, with a lateral borehole. Upper and lower edges of the window 16 are clearly visible in Figures 1 and 4 of the accompanying drawings. The body member 4 also comprises a lower cylindrical portion 22 threadedly attached to a lower end of the window portion 12. The lower cylindrical portion 22 comprises an upwardly facing shoulder 24 which projects radially into the bore 8 of the body member 4. Each of the body portions 10, 12, 22 define a portion of the body bore 8. The body member may be alternatively made up of components which are connected to one another by means other than threaded connectors. Body components may, for example, be welded to one another.



The deflector member 6 is slidably mounted in the bore 8 of the body member 4. The deflector member 6 comprises an upper portion upon which a deflecting surface 26 is defined and a lower cylindrical portion 28. The lower cylindrical portion 28 is sufficiently long to extend across the full length of the lateral window 16. A pair of O-ring seals 30,32 are located at opposite ends of the lower portion 28. The positioning of the O-ring seals 30,32 is such that, with the lower cylindrical portion 28 spanning the lateral window 16, the two pairs of seals 30,32 may locate either side of the lateral window 16 so that, in use, wellbore fluid flowing into any space between the exterior of the lower portion 28 and the interior of the window portion 12 cannot flow into a bore 34 extending axially through the deflector member 6. Any suitable seals may be used as an alternative to the O-ring seals 30, 32.

The internal diameter of the deflector bore 34 reduces in the region of the upper portion of the deflector member 6. In this way, the deflecting surface 26 is defined as a ridge running axially up along the inside of the deflector bore 34. In use, downhole equipment having an outer diameter smaller than the larger internal diameter of the deflector bore 34 may be run into the deflector member 6. If this downhole equipment has an outer diameter greater than the reduced internal diameter of the deflector bore 34 however, said equipment will engage the deflecting surface 26 and be pressed laterally towards the side of the tool 2. The wall of the deflector member 6 diametrically opposite the deflecting surface 26 is provided with an elongate opening 36 which has approximately the same size and shape as the lateral window 16. Thus, through appropriate use of the tool 2, the opening 36 may be aligned with the lateral window 16 so that downhole equipment engaging the deflecting surface 26 may be pressed through the lateral window 16 and into an adjacent lateral wellbore.

Movement of the deflector member 6 within the body member 4 is achieved in use through the action of a suitable hydraulic actuator (not shown) connected to the deflector member. This movement of the deflector member 6 is restricted by a control pin 38 and groove 40 arrangement. The control pin 38 is fixedly secured to the window portion 12 of the body member 4 so as to extend radially into the body bore 8 and thereby locate in the control groove 40 which is defined in the exterior surface of the deflector member 6. More specifically, the control pin 38 is fixed to the window portion 12 above the lateral

window 16. The unwrapped profile of the control groove 40 is shown in Figure 3 of the accompanying drawings.

It will be understood by those skilled in the art that the control groove 40 constrains the deflector member 6 to cycle axially between first and second positions in which the lateral window 16 is closed and sealed by the lower portion 28 and the seals 30, 32. After the deflector member 6 has been cycled a predetermined number of times, the control pin 38 will locate in an axially extended portion 42 of the control groove 40. With the control pin 38 so located, the deflector member 6 may be moved a considerable axial distance within the body member 4 so that the deflecting surface 26, previously located above the lateral window 16 (see Figures 1A and 1B), is located adjacent the lateral window 16 (see Figures 4A and 4B). In this latter position, the lower cylindrical portion 28 of the deflector member 6 is located below the lateral window 16 and abuts the shoulder 24. Abutment of the deflector member 6 with the shoulder 24 avoids damaging the control pin 38 on the extended portion 42 of the groove 40. It will be appreciated that the arrangement of the control groove 40 ensures that, when the pin 38 is in the extended groove portion 42, the deflector member 6 is in a rotary position whereby the deflecting surface 26 faces the lateral window 16 so that downhole equipment may be deflected through said window 16. As such, the deflector member 6 as shown in Figures 1A and 1B may be considered as being in a closed position, whereas the deflector member 6 as shown in Figures 4A and 4B may be considered as being in an open position.

The tool 2 shown in Figures 1 to 4 is moved between closed and open configurations by pumping wellbore fluid to a hydraulic actuator so as to cycle the control pin 38 through the control groove 40. The actuator may comprise a motor which drives the deflector member by means of a suitable gear mechanism. Furthermore, the actuator used with the tool 2 of Figures 1 to 4 need only drive the deflector member axially uphole and downhole. Provided the connection between the actuator and deflector member allows rotation between the two components, the control pin and groove arrangement will translate axial movement of the deflector member into rotational movement thereof. Alternatively, movement of the deflector member 6 may be achieved through mechanical manipulation thereof. The deflector member 6 may be physically forced uphole and downhole, as appropriate, with the control pin and groove arrangement being relied upon

to rotate the deflector member 6. If the actuator moves the deflector member both axially and rotationally, then the pin and groove arrangement may be omitted (movement of the deflector member between open and closed positions then being controlled solely by the actuator).

In Figures 5 and 6 of the accompanying drawings, a second downhole tool 102 according to the present invention is illustrated wherein movement of a deflector member 106 relative to a body member 104 is achieved through physical manipulation of the deflector member 106 by means of an extrinsic gripping tool (not shown). Movement of the deflector member 106 relative to the body member 104 is nevertheless controlled by means of a control pin 138 and groove 140 arrangement. However the groove 140 comprises a portion 141 which extends circumferentially without any axial component and, accordingly, the application of simply an axial force to the deflector member 106 will not effect movement of the control pin 138 along the aforesaid control groove portion 141. Movement of the control pin 138 along the aforesaid control groove portion 141 corresponds to a rotary movement of the deflector member 106 within the body member 104 without any concurrent axial movement of the deflector member 106. This sole rotary movement of the deflector member 106 is achieved through manipulation with the aforementioned extrinsic tool. This type of control pin/groove arrangement may replace the cycling pin/groove arrangement in the first downhole tool 2.

In addition to having a different pin/groove arrangement to that of the first downhole tool 2, the second tool 102 has the further modification of comprising a deflector member 106 which does not incorporate a lower cylindrical portion 28. The deflector member 106 of the second tool 102 also does not comprise any seals. In the open position, a deflecting surface 126 of the deflector member 106 is arranged so as to face the lateral window 116 defined in the body member 104. The opening 136 of the deflector member 106 is also aligned with the lateral window 116. The open configuration of the second downhole tool 102 is shown in Figure 5 of the accompanying drawings. It will be seen with reference to this Figure that undue pressure on the control pin 138 is prevented by the abutment of the deflector member 6 with a shoulder 124 on a lower body portion 122.

In the closed configuration as illustrated in Figure 6 of the accompanying

drawings, the deflector member is rotated 180° from the open position. The deflector surface 126 therefore faces away from the lateral window 116 and a part-cylindrical portion of the deflector member 106 spans the lateral window 116. The lateral window 116 is thereby closed. However, due to the absence of appropriate seals, wellbore fluid may in use flow into the bore 134 of the deflector member 106. The control pin/groove arrangement also places the deflector member 106 in a position spaced from the shoulder 124. The groove may however be arranged so that the deflector member 106 abuts the shoulder 124 in both the open and closed positions. It will also be understood that the cyclical type of pin/groove arrangement of the first downhole tool 2 may be employed with the second tool 102.

During operation of each of the aforementioned tools 2, 102 shown in the accompanying drawings, it will be understood that the deflector member may be arranged in a closed position when a deflecting of downhole equipment through the lateral window and into an adjacent lateral borehole is not desired. With the deflector member in the closed position, an accidental deflection by the deflector member of downhole equipment will result in said equipment engaging the interior of the body member. This engagement will prevent further downhole movement of the equipment and provide a clear indication at the surface of the undesired deflection. However, provided the equipment diameter is less than the reduced bore diameter of the deflector member, the equipment should pass into the primary borehole below the primary/lateral junction. When a deflection of equipment into a lateral borehole is required, the deflector member is arranged in the open position.

The present invention is not limited to the specific embodiments described above. Alternative arrangements will be apparent to a reader skilled in the art. For example, the tool body may be an integral part of a wellbore casing. Also, the bore of the deflector member may be provided with a helical groove which, when exposed to a flow of fluid, generates a rotary force which assists in rotating the deflector member. This arrangement may obviate the need to physically manipulate the deflector member with a gripping tool. In a further alternative arrangement, biasing means may be provided for returning the deflector member to one of the open and closed positions. The biasing means may, for example, comprise a spring or compressed gas. Thus, in use of apparatus comprising

such an arrangement, the application of fluid pressure to the deflector member can move the deflector member downhole relative to the apparatus body into an open position. On release of fluid pressure, the deflector member will be pressed uphole relative to the apparatus body by the biasing means. Uphole movement of the deflector member from the open position may be prevented by a suitable latch type of mechanism as previously described in relation to the control pin and groove arrangement. The application of a required fluid pressure to the deflector member may be facilitated through the use of a frangible drop ball. When introduced into the apparatus string and received on a shoulder in the deflector member, the drop ball will allow the fluid pressures typically applied within the string to generate sufficient force to move the deflector member from its initial position to an open or closed position. The frangible ball may be removed from the apparatus (perhaps so as to reopen the deflector member bore and allow the running of further apparatus therethrough) by further increasing the fluid pressure and fracturing the drop ball into fragments sufficiently small to pass through the apparatus bore. The further increased fluid pressure may be sufficiently low to not move the deflector member once the frangible drop ball has been disintegrated. A suitable drop ball is described in UK Patent No 2,311,316 and the disclosure thereof is incorporated herein by reference.

Movement of the deflector member between open and closed positions may be restricted through use of a hydraulic actuation system dedicated to moving the deflector member. With such a system, the previous arrangement of a pin and groove is not necessarily required. The dedicated hydraulic system may comprise one or more hydraulic control lines extending from the surface to actuation means for moving the deflector member. The or each control line may be run separately from the main bore of the apparatus and may, for example, operate a motor for rotating the deflector member between open and closed positions. Indeed, the or each control line may direct hydraulic fluid to any suitable device for converting fluid pressure into either longitudinal or rotational movement, or a combination of both movements, so that open or closed deflector member positions may be selected as required. With appropriate pressure activated valves, a single hydraulic control line extending from the surface may be used. A person skilled in the art will be familiar with suitable hydraulic systems for generating the required deflector member movement, although use of such systems will not, it is

believed, be known in the context of deflector member opening and closing apparatus.

It will be apparent to the skilled person that the present invention may be used to independently open and close multiple lateral windows extending through a primary borehole. By way of example, Figure 7 of the accompanying drawings shows a downhole assembly comprising the tool 102 of Figures 5 and 6 connected to the uphole end of a further tool 102' of Figures 5 and 6. In Figure 7, the uphole tool 102 is shown with the deflector member 106 arranged in an open position. The lower tool 102' is shown with the deflector member 106' arranged in a closed position. The two deflector members 106, 106' may be individually moved between open and closed positions by, for example, physical manipulation with an appropriate gripping tool. In this regard, a string to be run through either the primary borehole or the lateral borehole may be provided with a leading head which has an expandable diameter. The head diameter may be expandable through use of one or more circumferential elastomeric rings which may be radially displaced through the axial displacement of abutting cam surfaces. The cam surfaces may be axially moved by, for example, a hydraulic actuation system.

In Figures 8 and 9, an expandable head tool 200 is shown in an unexpanded state passing through the deflector bore of a deflector member in closed and open positions respectively. In each Figure, the deflector member is that of the second embodiment shown in Figures 5 and 6. It will be understood that the expandable head tool 200 comprises two elastomeric rings 202, 204 which may be moved radially by the relative movement of camming surfaces 206, 208 located on either side of each ring 202, 204. Relative axial movement of said camming surfaces 206, 208 is achieved by pumping fluid from a bore 210 in said expandable head tool 200, through apertures 212, and into an annular chamber 214. Fluid leakage from the chamber 214 is prevented by appropriate ring seals 216.

As fluid is pumped into the chamber 214 of the expandable head tool 200, the camming surfaces 206, 208 move relative to one another so as to radially expand the two elastomeric rings 202, 204. The geometry of the expandable head tool 200 may be such that, when the rings 202, 204 are expanded whilst the tool 200 is located uphole of the deflecting surface of the deflector member 106, the rings 202, 204 remain radially spaced from the internal diameter of the deflector member but, when pushed downhole through

the deflector bore, the rings 202,204 engage the ramp surface provided by the reduction in the deflector bore diameter and thereby force the tool 200 through the lateral window (see Figure 10 of the accompanying drawings). In other words, when expanded, the rings 202,204 have an external diameter less than the larger internal diameter of the deflector bore but greater than the reduced internal diameter of the deflector bore. Thus, whether the expandable head tool 200 is run through the primary borehole or the lateral borehole may be conveniently determined by selectively expanding the elastomeric rings 202,204. The elastomeric nature of the rings 202,204 allows the tool 200 to return to its original smaller diameter when fluid is released from the fluid chamber 214.

It will be understood that the expandable head tool 200 may be used to grip the reduced diameter deflector bore, as shown in Figure 11, and subsequently manipulate the deflector between open and closed positions. This operation may be assisted by providing the deflector bore with a specific profile into which the tool 200 (or the rings 202,204 thereof) may latch. Furthermore, by appropriately expanding the rings 202,204, the tool 200 may be used to anchor equipment within the primary or lateral boreholes. This may be of use in jetting operations for example.

In circumstances where use of the section of primary borehole located downhole of the primary/lateral junction is not required, a solid deflector sub 300 may be secured adjacent the lateral window in the reduced diameter portion of the deflector bore so as to block the deflector bore and form (together with the deflector surface) a ramp with which equipment may be deflected through the lateral window. The deflecting ramp thereby formed will tend to be more robust than that formed by the deflector surface 126 alone.

The sub 300 is provided with latching means 302 for locating in a suitable profile 304 in the reduced diameter deflector bore. This profile may be that used in conjunction with the aforementioned expandable head tool 200. A profile may also be provided within the reduced diameter deflector bore for appropriately orienting the sub 300 relative to the lateral window. The latching means 302 preferably comprises radially expandable elements which may be retracted so as to allow passage of the sub 300 through the reduced diameter deflector bore. Figure 12 shows the sub 300 being run into the reduced diameter deflector bore, whilst Figure 13 shows the sub 300 latched within the reduced diameter deflector bore to provide a robust deflecting surface.

It will also be seen with reference to Figures 12 and 13 that, uphole of the deflector surface provided on the deflector member 306, the deflector member defines a further reduced diameter bore 307 in which the expandable head tool 200 may be expanded and thereby readily grip the deflector member 306 for subsequent manipulation. A larger diameter bore 309 is located between the two reduced diameter bores. With the expandable head tool 200 positioned in the larger bore 309, the tool 200 may be expanded without gripping (or without significantly gripping) the deflector member so that, when subsequently pressed downhole, the tool 200 is deflected by the deflector surface and directed through the lateral opening.

The deflector member 306 and solid deflector sub 300 of Figures 12 and 13 are shown in greater detail in Figure 14 of the accompanying drawings. It will be seen that the solid deflector sub 300 comprises a ramp portion 301 for deflecting wellbore equipment. The ramp portion 301 has a longitudinally extending hydraulic line 303 located therein which has an opening 305 onto the surface of the ramp portion 301. The hydraulic line 303 communicates with further hydraulic passages 311, 313 so that the portion of primary borehole located uphole of the sub 300 may hydraulically communicate with the portion of primary borehole located downhole of the solid deflector sub 300. The latching means 302 comprises three latching members 315 (only one of which is shown in Figure 14) which are biased by means of a spring 317 towards a radially expanded position. Once the latching means 302 locates adjacent the profile 304, the latching members 315 have sufficient room to be pressed by the spring 317 into a locked radially expanded position as shown in Figure 14. Orientation of the solid deflector sub 300 is achieved by locating a radially extendable locating pin 319 into an orienting profile 320 and pulling the solid deflector sub 300 uphole. As the sub 300 is pulled uphole, the pin 319 runs within the orienting profile 320 and thereby rotates the ramp portion 301 to the desired angular position. The pin 319 is itself biased radially outwardly into the orienting profile 320 by means of two springs 321.

The deflector member 306 does not necessarily need to be used as the moveable portion shown in Figures 12 and 13. The deflector member 306 may be used in isolation with or without the solid deflector sub 300. The deflector member 306 may be used as part of a casing string and may be used to particular advantage with an expandable head



f

tool so as to provide selective lateral entry.

1

CLAIMS:

1. A downhole tool for selectively opening and closing a lateral borehole extending from a primary borehole, the downhole tool comprising a body incorporating a wall provided with an opening extending therethrough; a deflector member slidably mounted in the body and having a deflecting surface for deflecting, in use, downhole equipment laterally within the body, the deflector member being slidable between an open position, in which the deflecting surface is located adjacent and facing towards said opening so that, in use, downhole equipment laterally deflected by the deflecting surface is directed through said opening, and a closed position, in which the deflecting surface is oriented relative to said opening so as to prevent downhole equipment from being laterally deflected through said opening during use; and constraining means for restricting movement of the deflector member relative to the body.
  2. A downhole tool as claimed in claim 1, wherein the constraining means comprises a pin and groove arrangement.
  3. A downhole tool as claimed in claim 2, wherein at least one pin is secured to one of the body and deflector member for locating in the groove defined in the other of the body and deflector member.
  4. A downhole tool as claimed in claim 2 or 3, wherein the pin and groove arrangement is such that the deflector member must move axially between two different closed positions before being able to move axially to the open position.
  5. A downhole tool as claimed in any of the preceding claims, wherein the constraining means comprises a shoulder defined by the body and against which the deflector member abuts when in the open position.
  6. A downhole tool as claimed in any of the preceding claims, comprising means for allowing axial movement of the deflector member by the action of fluid pressure.
-

7. A downhole tool as claimed in any of the preceding claims, wherein a bore extends axially through the deflector member.
8. A downhole tool as claimed in claim 7, wherein the bore extending axially through the deflector member comprises first and second portions, the first portion having a larger diameter than the second portion.
9. A downhole tool as claimed in claim 8, wherein the deflecting surface is defined on that portion of the deflector member reducing the diameter of the bore through the deflector member.
10. A downhole tool as claimed in any of claims 7 to 9, wherein sealing means are provided between the body and deflector member so that, when in the closed position, fluid located exteriorly of the body is prevented from flowing into the bore of the deflector member.
11. A downhole tool as claimed in claim 10, wherein said sealing means comprises seals mounted on the deflector member and axially spaced from one another so as to be locatable beyond each axial end of said opening.
12. A downhole tool as claimed in any of the preceding claims, wherein, in the closed position, the deflecting surface of the deflector member faces diametrically away from said opening.
13. A downhole tool as claimed in any of the preceding claims, wherein, in the closed position, said opening is completely covered by the deflector member.
14. A downhole tool as claimed in any of the preceding claims, wherein, in the closed position, the deflecting surface is axially spaced from said opening.

15. A method of using a downhole tool according to any of the preceding claims, the method comprising the steps of running said tool down a primary borehole, aligning said opening of said tool body with a lateral borehole extending from said primary borehole, and selectively moving said deflector member between said open and closed positions.

16. A method as claimed in claim 15, wherein said step of moving said deflector member comprises the step of applying a fluid pressure to hydraulic actuation means connected to said deflector member.

17. A method as claimed in claim 16, wherein said step of moving said deflector member comprises the step of gripping said deflector member with a further tool and manipulating said deflector member with said further tool.

18. A downhole deflector member comprising a cylinder having a window provided in a side thereof and having a ramp defined on an interior surface thereof for deflecting, in use, downhole equipment through said window; wherein a bore extends longitudinally through the deflector member so as to allow, in use, a passage of downhole equipment through the deflector member without deflection by said ramp; and wherein a portion of said bore located uphole of said ramp has a larger diameter than the remainder of said bore.

19. A downhole deflector member as claimed in Claim 18, wherein said remainder of said bore is located both uphole and downhole of said portion of said bore.

20. A method of using the deflector member as claimed in Claim 18 or 19, the method comprising the step of running an expandable head tool downhole into the deflector member; expanding said tool so as to increase the diameter thereof and thereby prevent passage of said tool through the remainder of said bore; and pressing said tool downhole so that said tool is deflected by said ramp.

ABSTRACTAPPARATUS AND METHOD FOR  
OPENING AND CLOSING LATERAL BOREHOLES

The present invention relates to a downhole tool (102) for selectively opening and closing a lateral borehole extending from a primary borehole. The tool (102) comprises a body (104) incorporating a wall provided with an opening (116) extending therethrough; a deflector member (106) slidably mounted in the body (104) and having a deflecting surface (126) for deflecting, in use, downhole equipment laterally within the body (104). The deflector member (106) is slidable between an open position, in which the deflecting surface is located adjacent and facing towards said opening so that, in use, downhole equipment laterally deflected by the deflecting surface is directed through said opening, and a closed position, in which the deflecting surface is oriented relative to said opening so as to prevent downhole equipment from being laterally deflected through said opening during use. In either position, equipment may pass into the primary borehole downhole of the primary/lateral junction. The tool (102) also comprises constraining means (138,140) for restricting movement of the whipstock relative to the body.

(Figure 5)

1/11

FIG. 1A

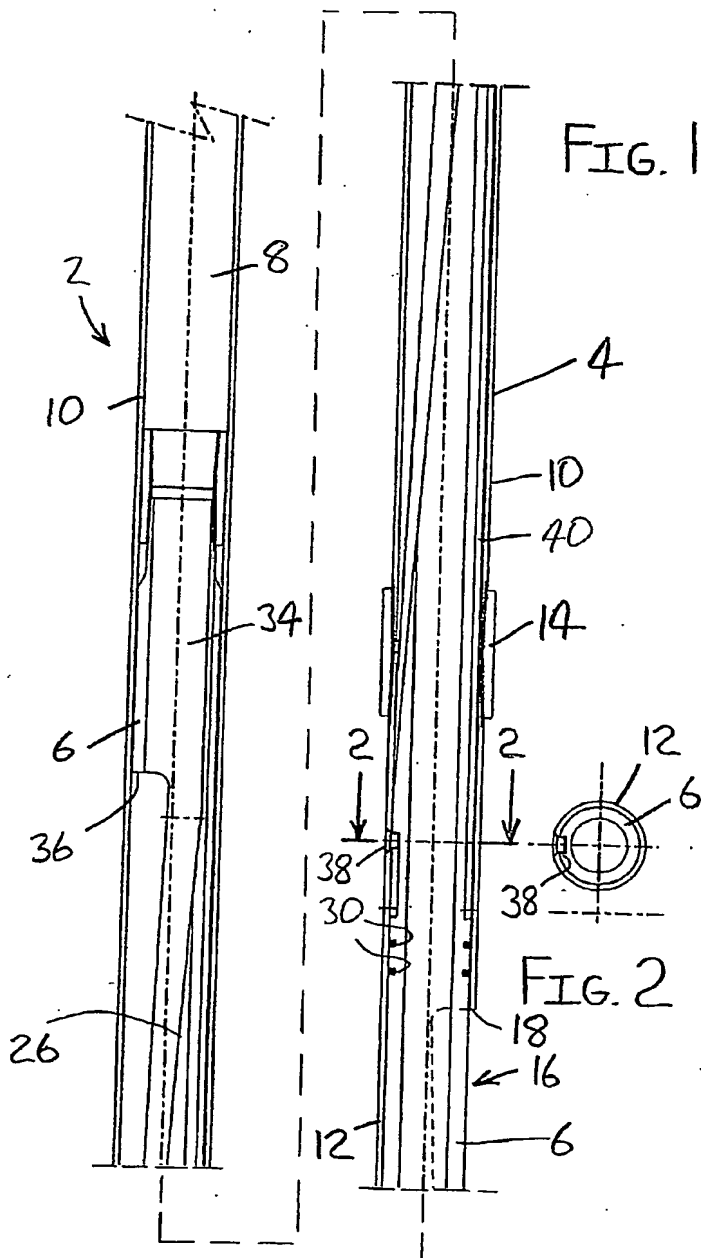


FIG. 2


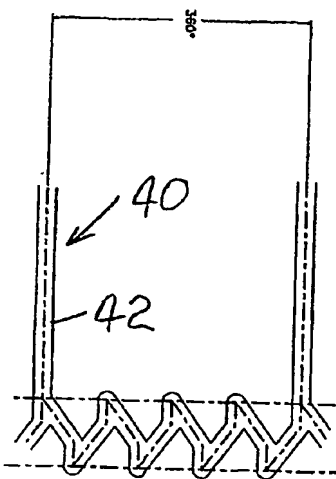



FIG. 3

spare

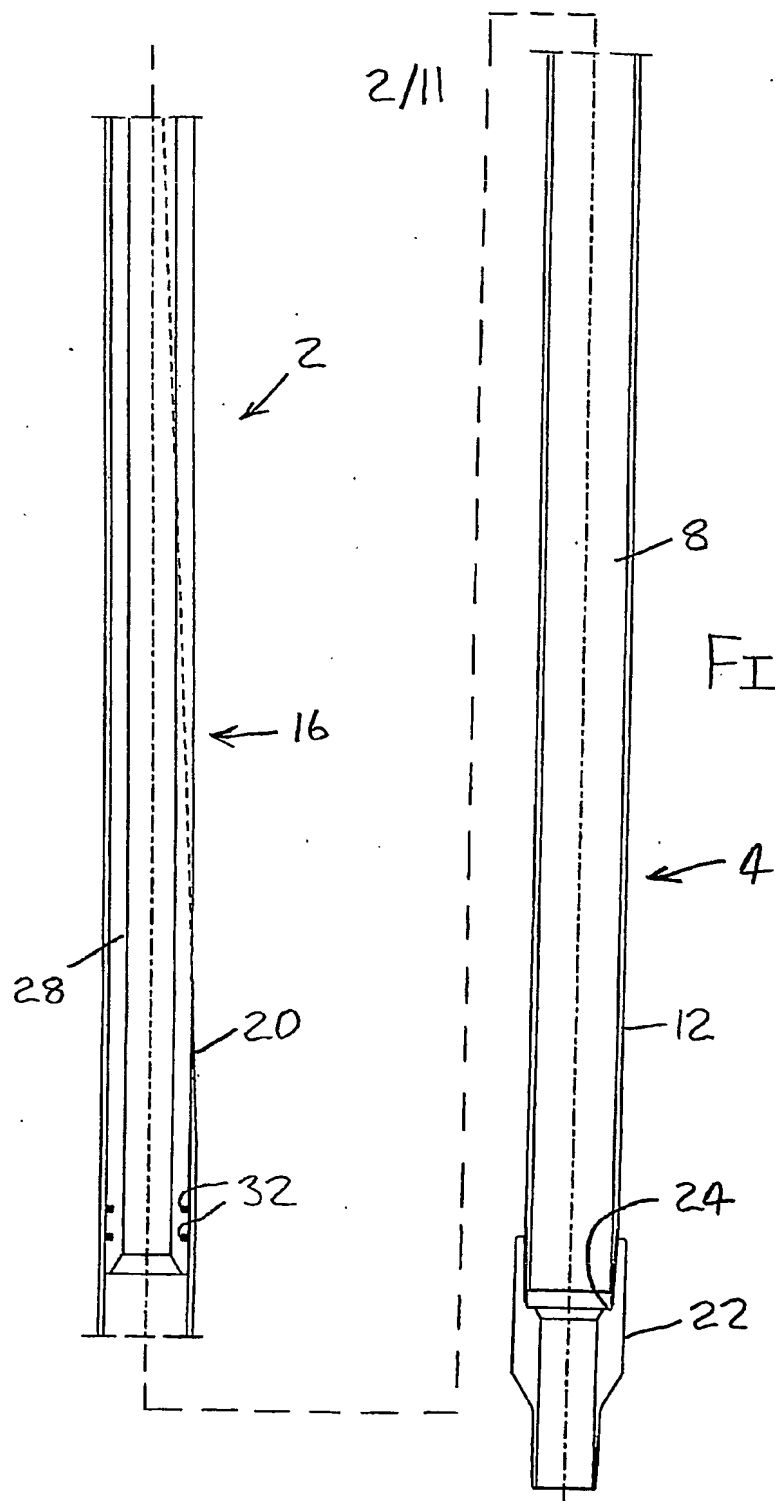


spare

3/11

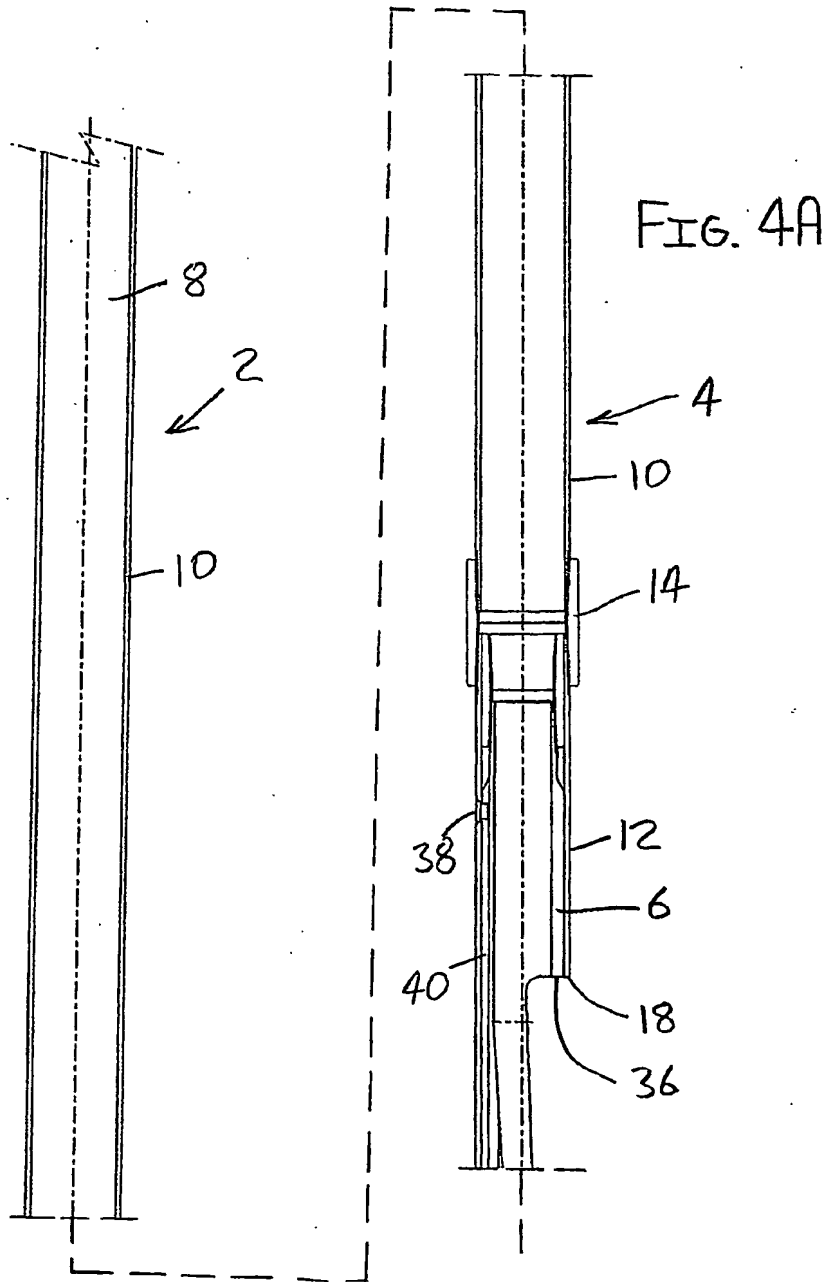

spare



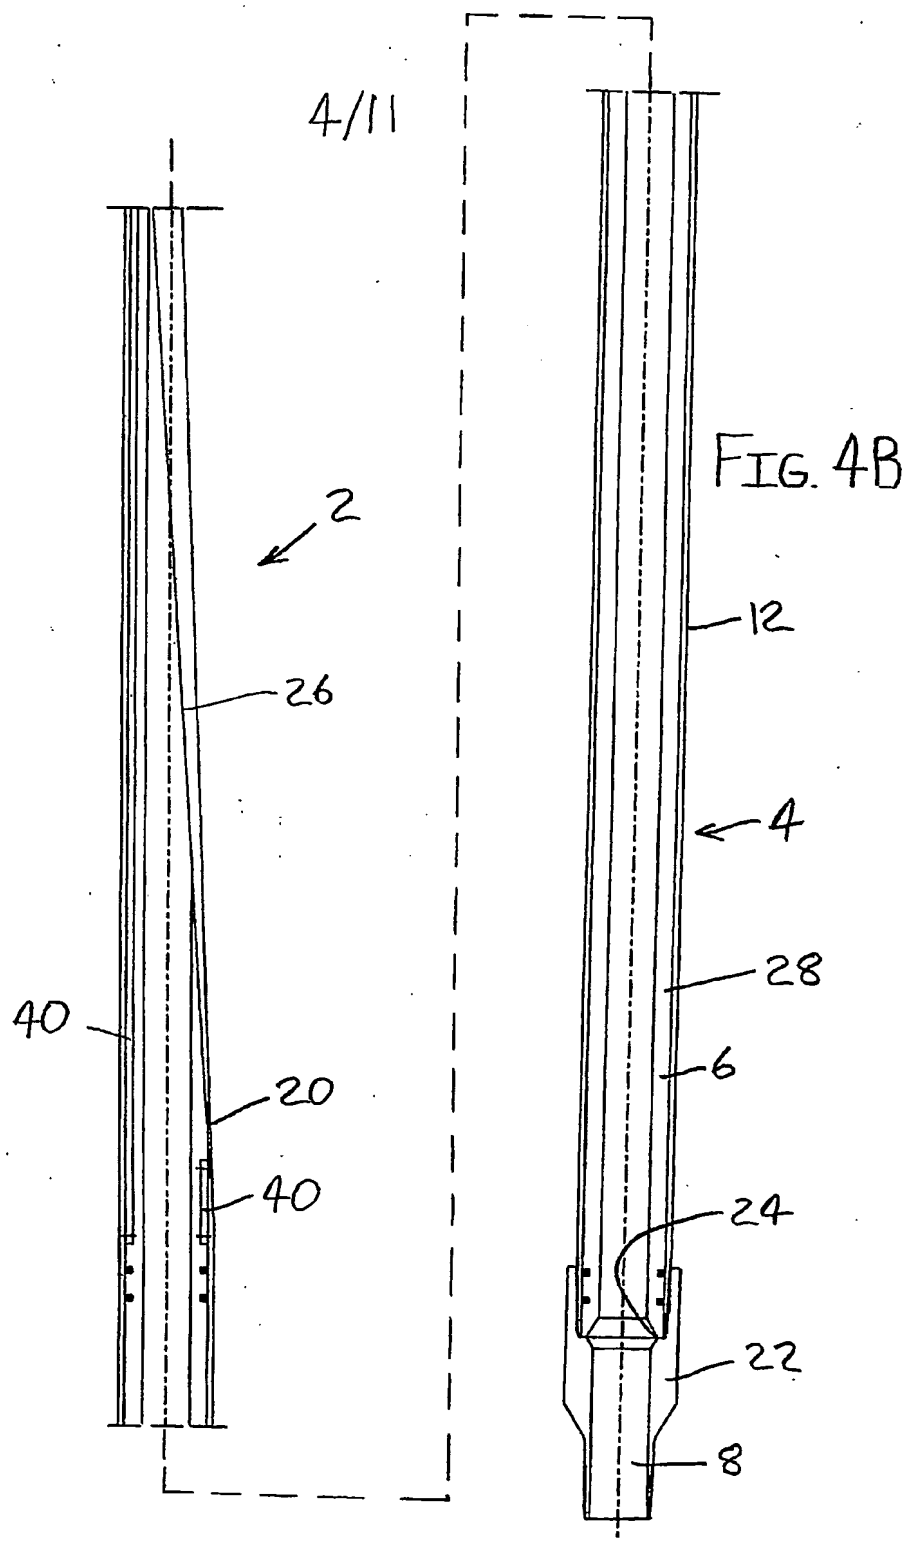

5/11


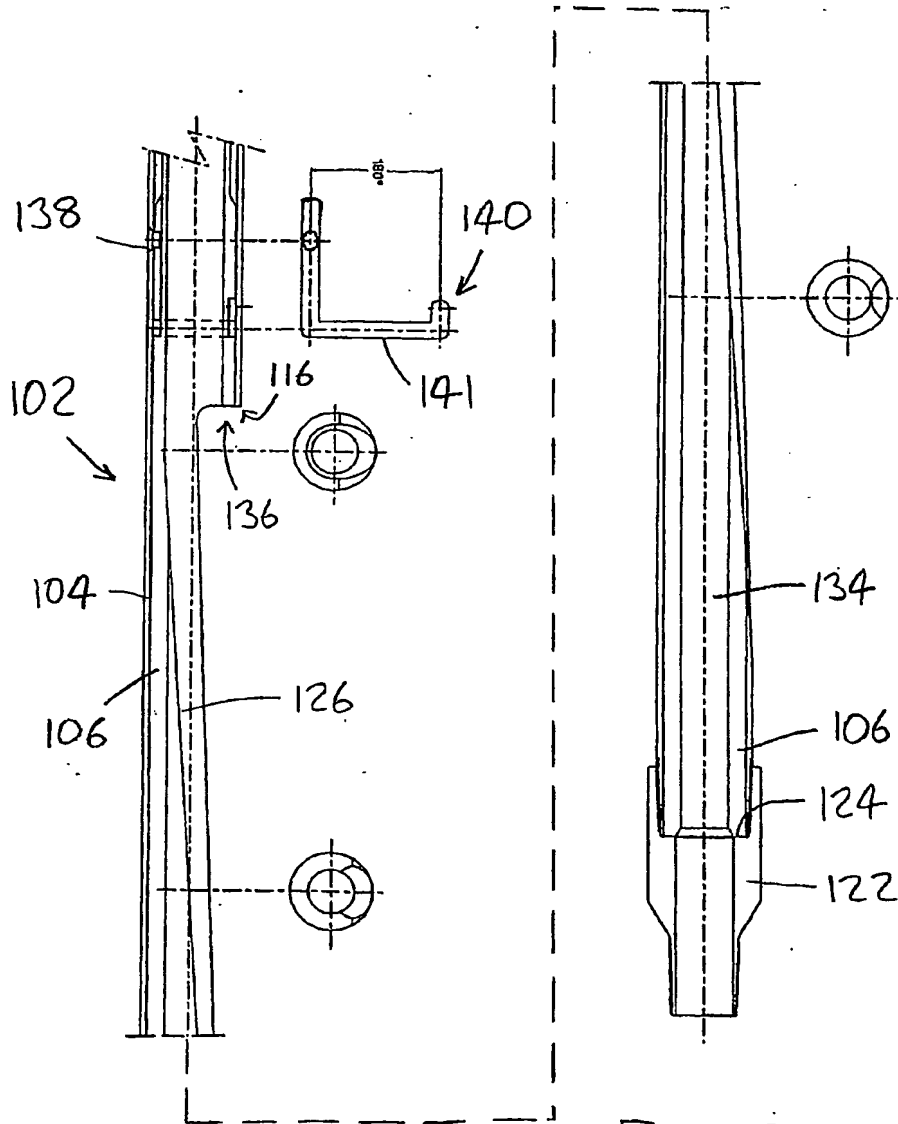



FIG. 5

spare

6/11

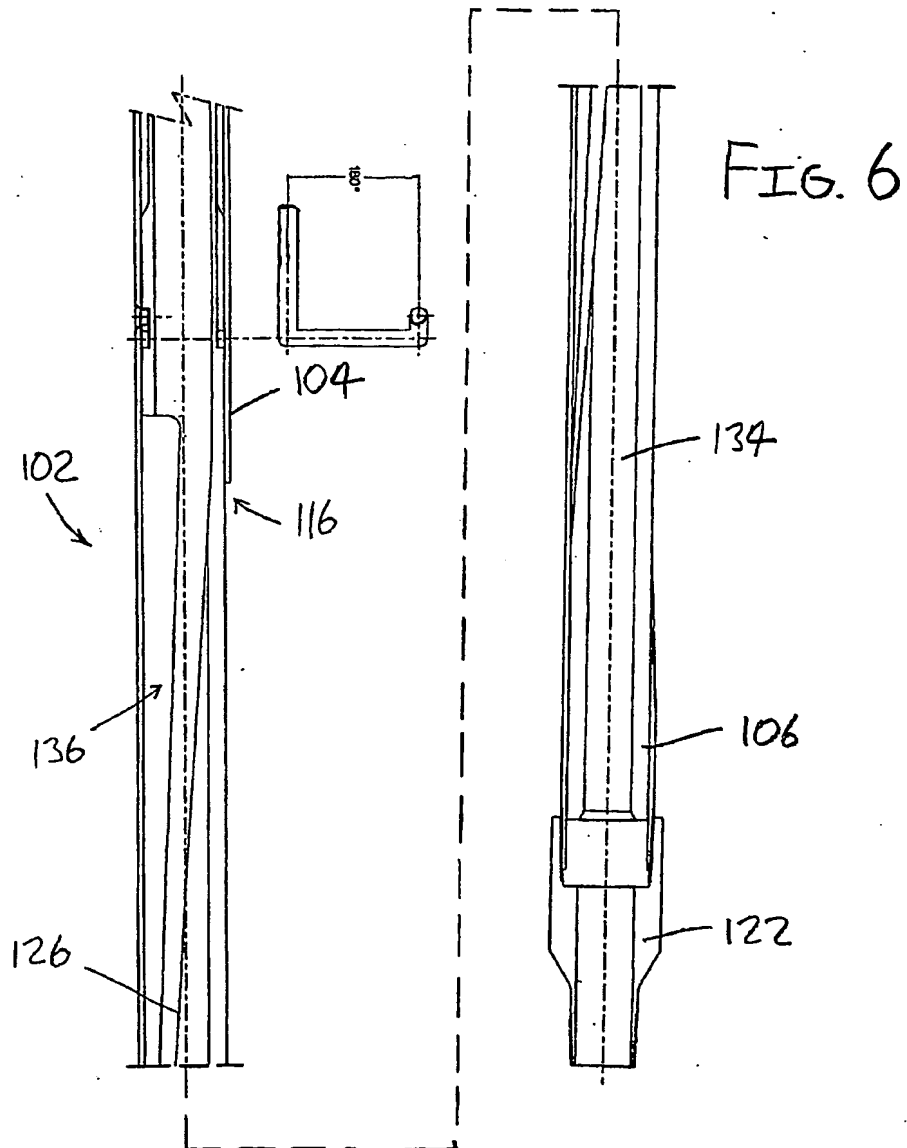

spare

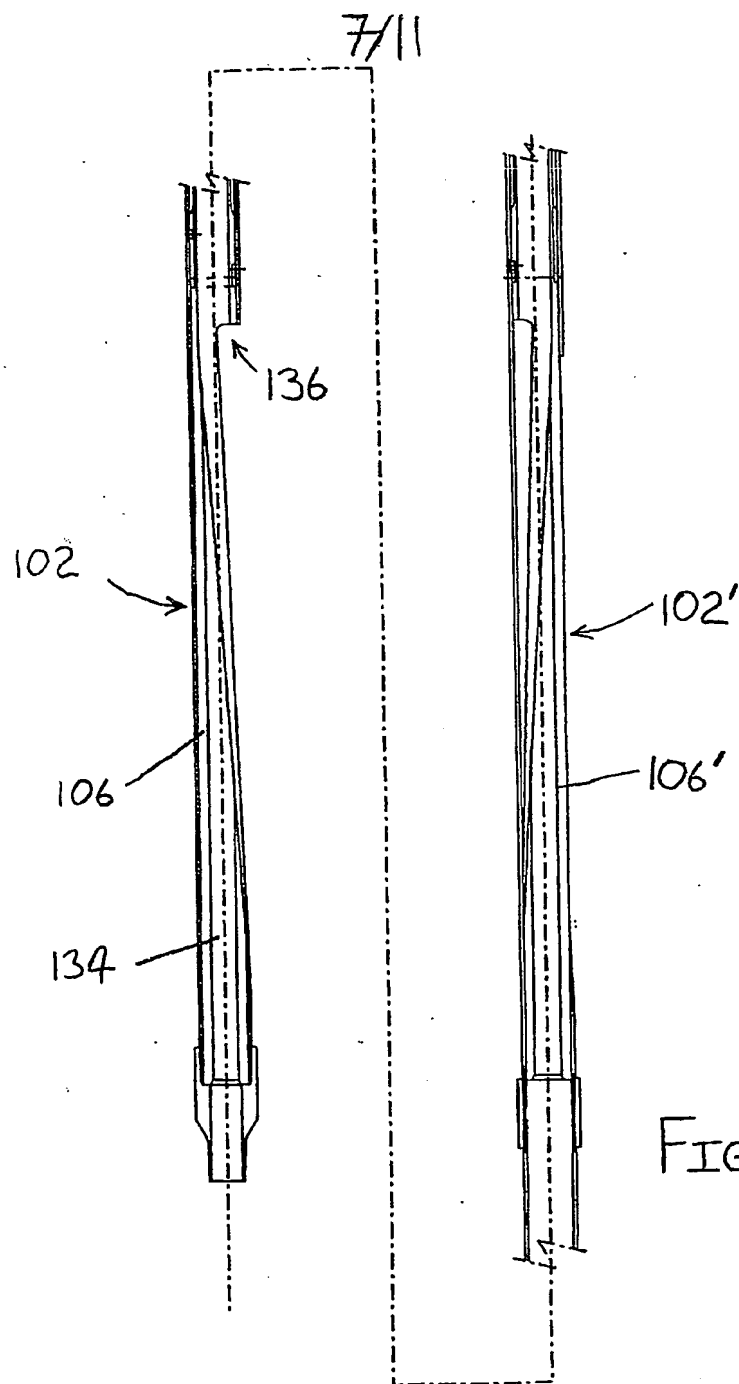

spare

8/11

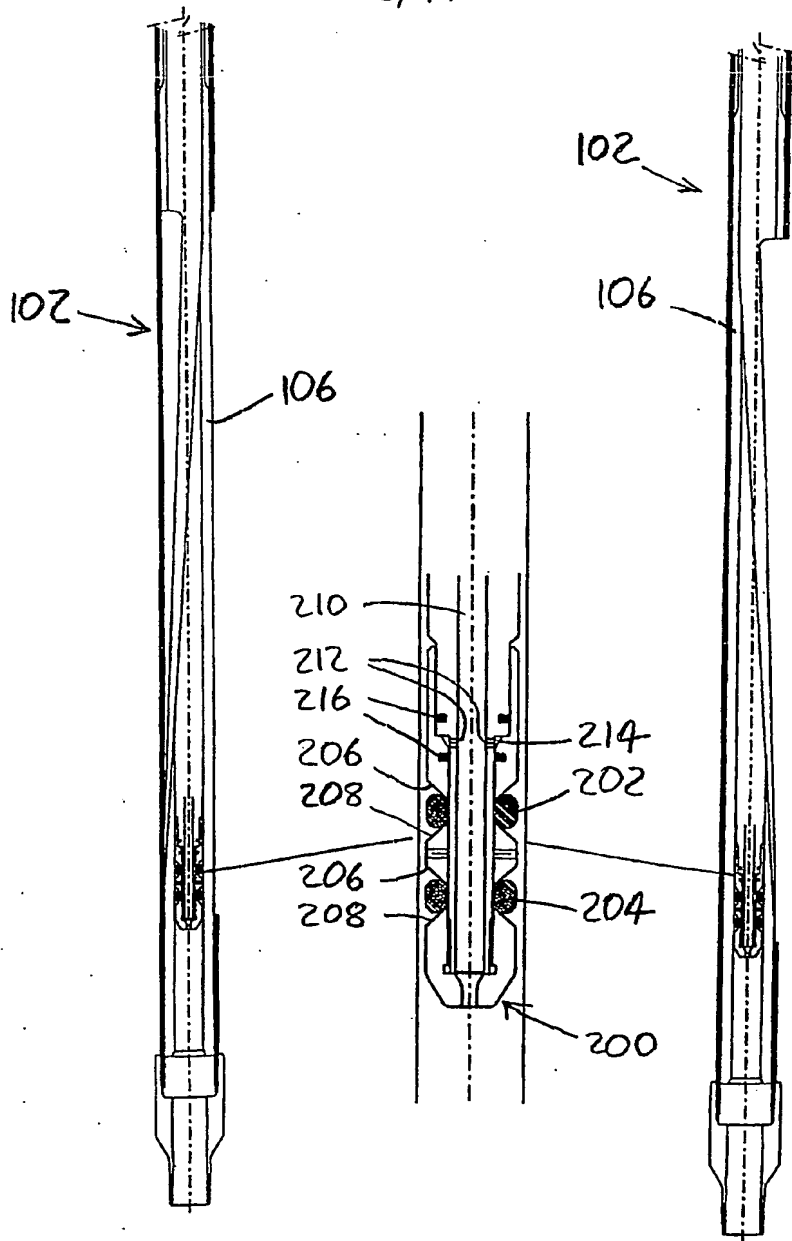


FIG. 8

FIG. 9

spare

9/11

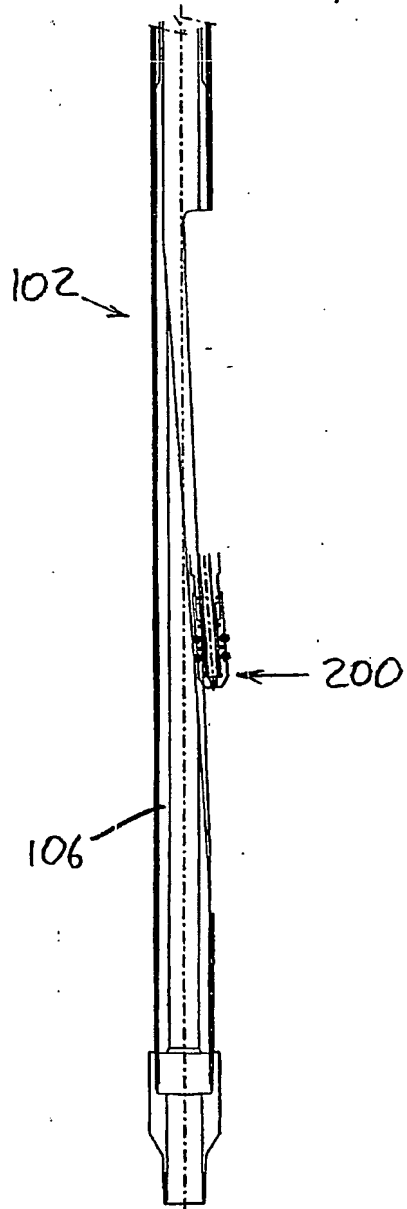


FIG. 10

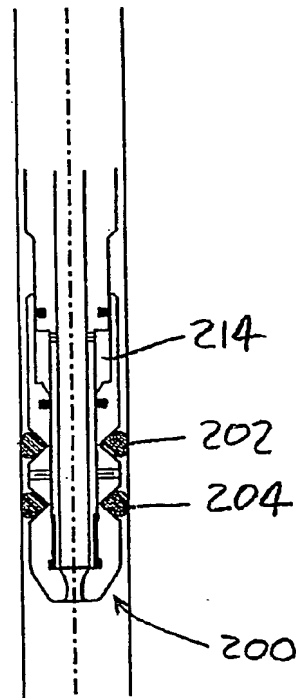


FIG. 11

spare

10/11

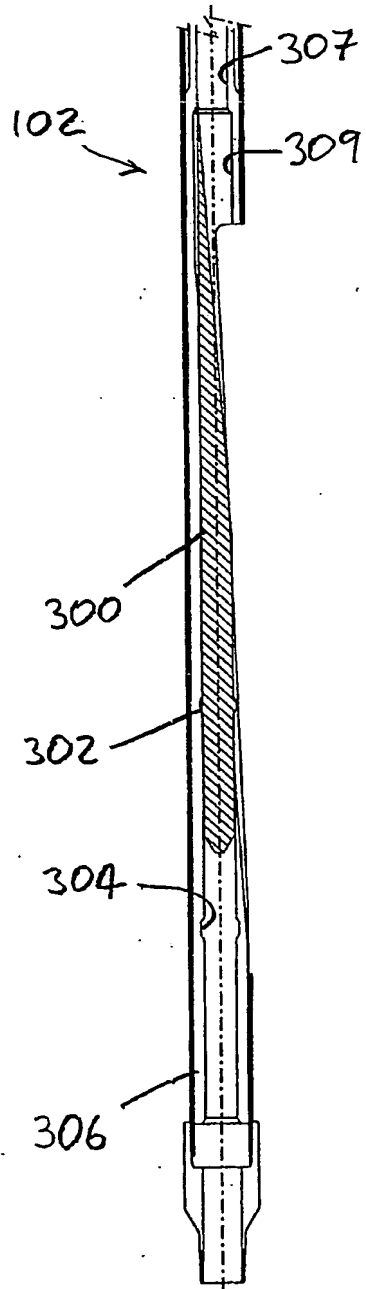


FIG. 12


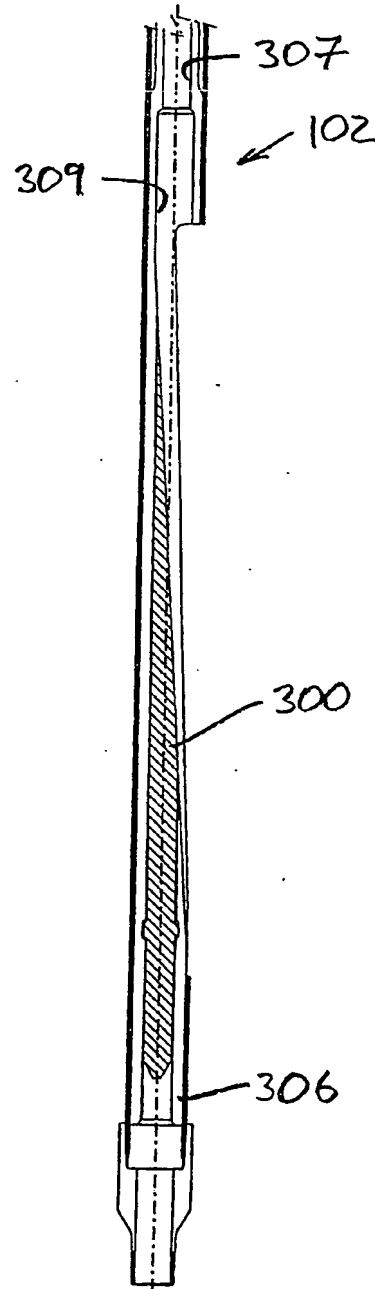


FIG. 13

spare

11/11

FIG. 14

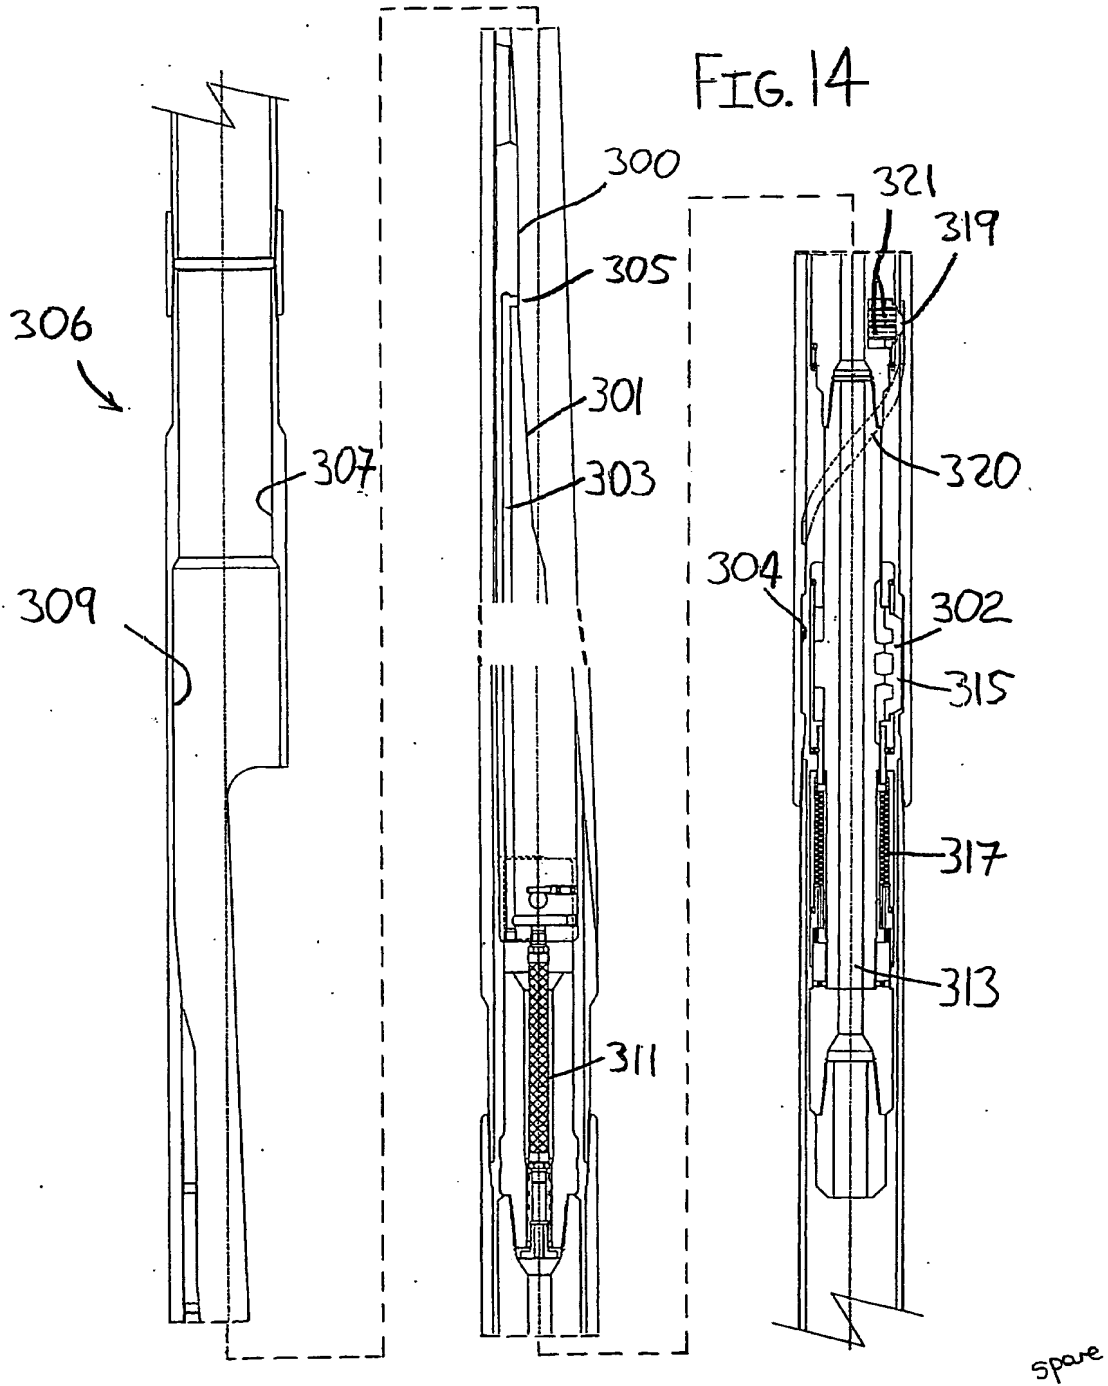



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**